

1

2


3

4

5

6

REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	21. 1.08		<i>Patrick, Cho</i>

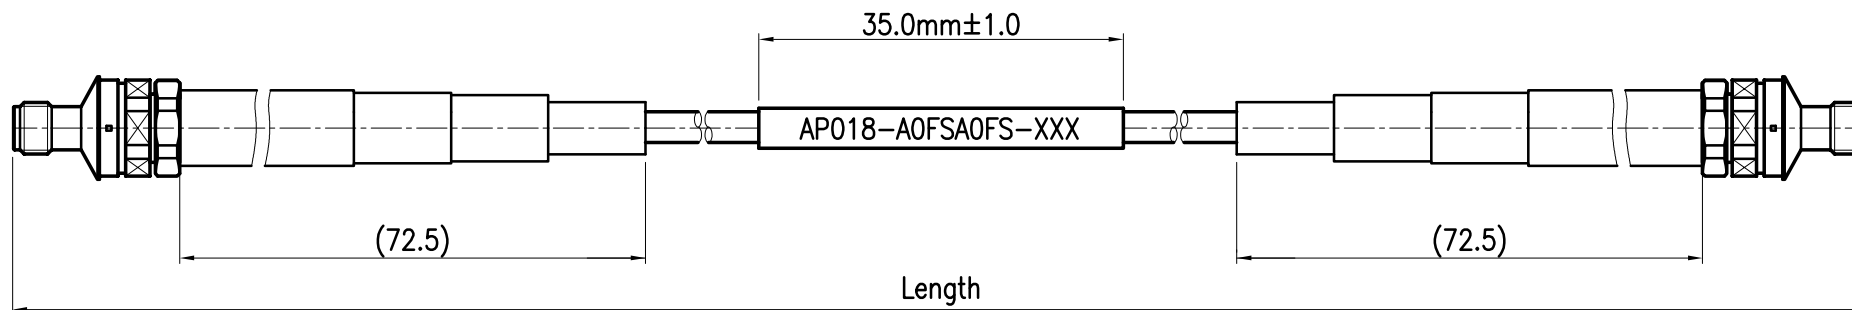

## NOTE

## 1. Specification

- 1.1 Frequency : DC ~ 18GHz
- 1.2 Impedance : 50 Ohm nom
- 1.3 VSWR : 1.20 Max.

## 2. RoHs Compliance : Directive (EU) 2015/863

## CABLE INSERTION LOSS

INSERTION LOSS	
	1.6 dB at 12 GHz
	2.0 dB at 18 GHz

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL    2 PLACE DECIMAL    ANGLES    1.6 a  $\sqrt{\quad}$      $\odot$      $\nabla$   
 $\pm 2.0$  mm     $\pm 1^\circ$

REMOVE BURRS. BREAK SHARP EDGES

This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of AplusRF

MATERIAL

N / A

FINISH

N / A

REFERENCE

DRAWN

*SY Kim*

DATE

2021. 1. 08

ENGINEER

DATE

APPROVED

*Patrick, Cho*

DATE

2021. 1. 08

CAD FILE

CAD:/CABLE ASSY/TEST CABLE

TITLE

CABLE ASSEMBLY  
SMA(F)ST TO SMA(F)ST  
TEST CABLE

**AplusRF**

SCALE

N.S

SHEET

1 of 1

DRAWING No.

AP018-A0FSA0FS-XXX

REV.

A

1

2

3

4

5

6