

1

2


3

4

5

6

REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	21. 1.08		<i>Patrick, Cho</i>

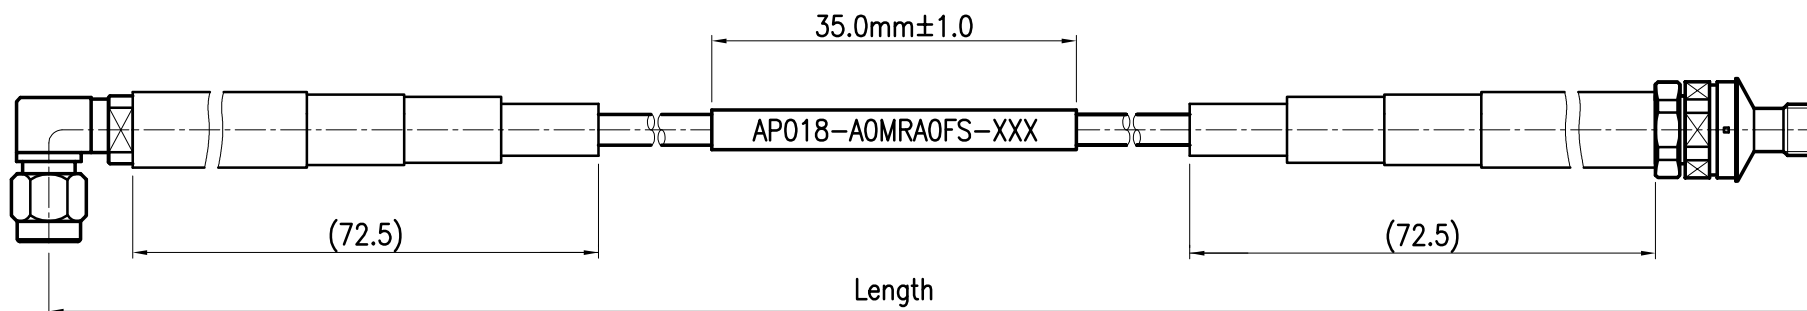

NOTE

1. Specification

- 1.1 Frequency : DC ~ 18GHz
- 1.2 Impedance : 50 Ohm nom
- 1.3 VSWR : 1.20 Max.

2. RoHs Compliance : Directive (EU) 2015/863

CABLE INSERTION LOSS

INSERTION LOSS	
	1.6 dB at 12 GHz
	2.0 dB at 18 GHz

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL 2 PLACE DECIMAL ANGLES 1.6 a $\sqrt{\quad}$ \odot ∇
 ± 2.0 mm $\pm 1^\circ$

REMOVE BURRS. BREAK SHARP EDGES

MATERIAL	N / A	DRAWN	<i>Sy Kim</i>	DATE	2021. 1. 08	TITLE CABLE ASSEMBLY SMA(M)RA TO SMA(F)ST TEST CABLE	AplusRF			
FINISH	N / A	ENGINEER		DATE						
REFERENCE		APPROVED	<i>Patrick, Cho</i>	DATE	2021. 1. 08					
This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of AplusRF		CAD FILE	CAD:/CABLE ASSY/TEST CABLE		DWG SIZE	A4	SCALE	N.S	SHEET	1 of 1
		DRAWING No.	AP018-A0MRA0FS-XXX		REV.	A				

1

2

3

4

5

6