

1

2


3

4

5

6

REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	21. 1.08		<i>Patrick, Cho</i>

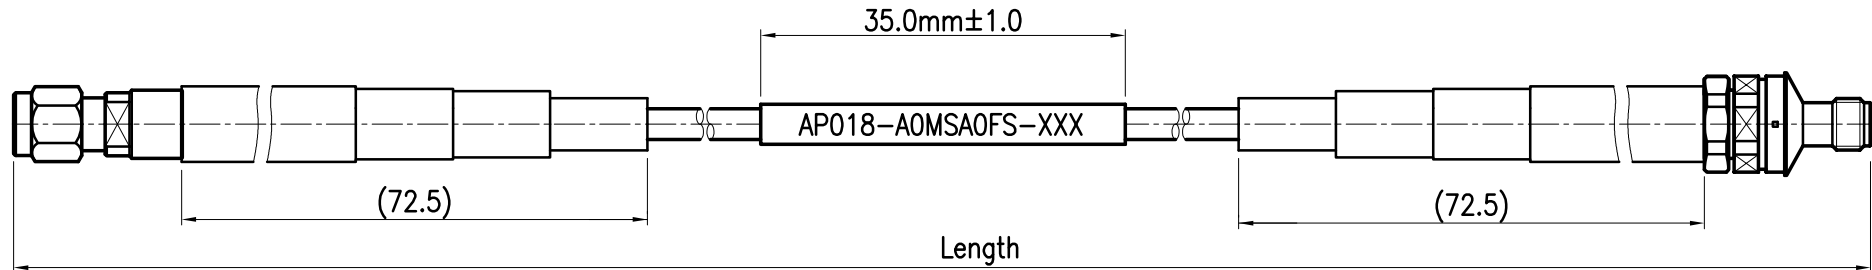

NOTE

1. Specification

- 1.1 Frequency : DC ~ 18GHz
- 1.2 Impedance : 50 Ohm nom
- 1.3 VSWR : 1.30 Max.

2. RoHs Compliance : Directive (EU) 2015/863

CABLE INSERTION LOSS

INSERTION LOSS	
	1.6 dB at 12 GHz
	2.0 dB at 18 GHz

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL 2 PLACE DECIMAL ANGLES 1.6 a $\sqrt{\quad}$ \odot \ominus
 ± 2.0 mm $\pm 1^\circ$

REMOVE BURRS. BREAK SHARP EDGES

This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of AplusRF

MATERIAL

N / A

FINISH

N / A

REFERENCE

DRAWN

Sy Kim

DATE

2021. 1. 08

ENGINEER

DATE

APPROVED

Patrick, Cho

DATE

2021. 1. 08

CAD FILE

CAD:/CABLE ASSY/TEST CABLE

TITLE

CABLE ASSEMBLY
SMA(M)ST TO SMA(F)ST
TEST CABLE

DWG SIZE

A4

SCALE

N.S

SHEET

1 of 1

DRAWING No.

AP018-A0MSA0FS-XXX

REV.

A

AplusRF

1

2

3

4

5

6