

1

2


3

4

5

6

REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	21. 1.08		<i>Patrick, Cho</i>

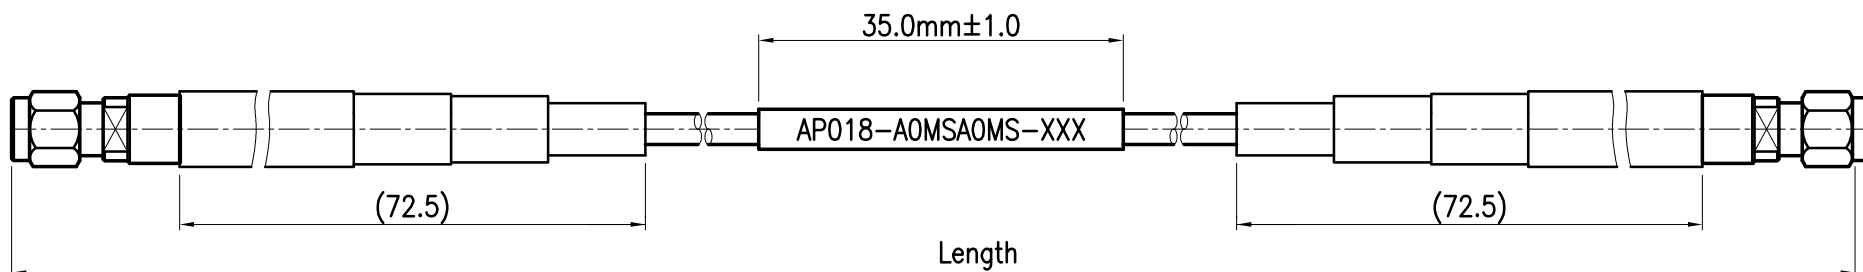

## NOTE

## 1. Specification

- 1.1 Frequency : DC ~ 18GHz
- 1.2 Impedance : 50 Ohm nom
- 1.3 VSWR : 1.30 Max.

## 2. RoHs Compliance : Directive (EU) 2015/863

## CABLE INSERTION LOSS


INSERTION LOSS	
	1.6 dB at 12 GHz
	2.0 dB at 18 GHz

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL    2 PLACE DECIMAL    ANGLES    1.6 a  $\sqrt{\phantom{x}}$      $\oplus$      $\ominus$   
 $\pm 2.0$  mm                       $\pm 1^\circ$

REMOVE BURRS. BREAK SHARP EDGES

This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of AplusRF

MATERIAL	N / A	DRAWN	DATE	TITLE			
FINISH	N / A	<i>Sy Kim</i>	2021. 1. 08	CABLE ASSEMBLY SMA(M)ST TO SMA(M)ST TEST CABLE			
REFERENCE		ENGINEER	DATE			SCALE	SHEET
		APPROVED	DATE		N.S	1 of 1	
		<i>Patrick, Cho</i>	2021. 1. 08	CAD FILE	DWG SIZE	DRAWING No.	REV.
				CAD:/CABLE ASSY/TEST CABLE	A4	AP018-A0MSA0MS-XXX	A

1

2

3

4

5

6