

1

2


3

4

5

6

| REV | DESCRIPTION | DATE | ECO | APPR |
|-----|------------------|----------|-----|---------------------|
| A | Register drawing | 21. 1.08 | | <i>Patrick, Cho</i> |

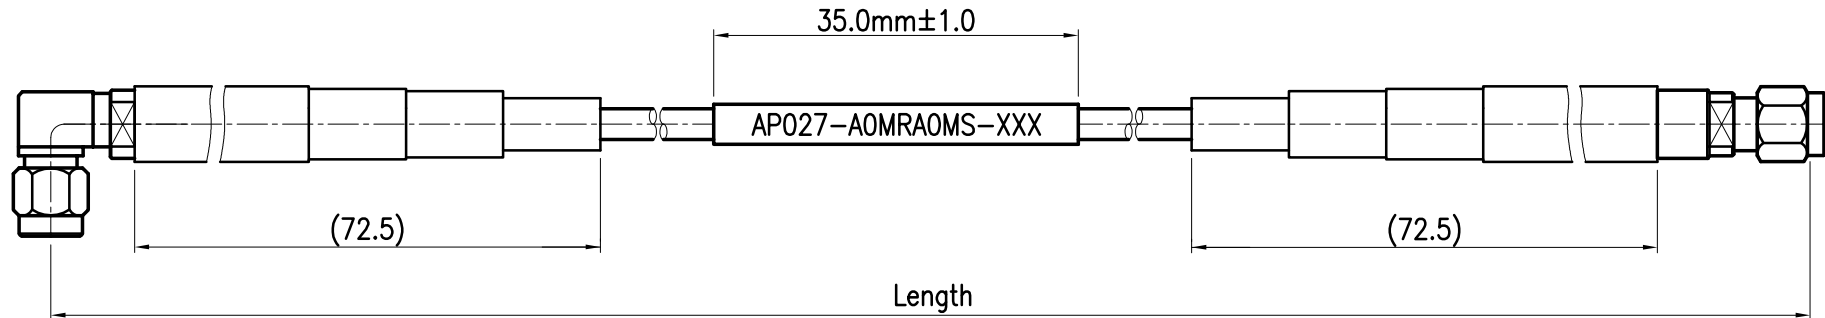

NOTE

1. Specification

1.1 Frequency : DC ~ 26.5GHz

1.2 Impedance : 50 Ohm nom

1.3 VSWR : 1.30 Max.

2. RoHs Compliance : Directive (EU) 2015/863

CABLE INSERTION LOSS

| | |
|----------------|--------------------|
| INSERTION LOSS | 1.6 dB at 12 GHz |
| | 2.0 dB at 18 GHz |
| | 2.5 dB at 26.5 GHz |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL 2 PLACE DECIMAL ANGLES 1.6 a $\sqrt{\quad}$ \odot ∇
 ± 2.0 mm $\pm 1^\circ$

REMOVE BURRS. BREAK SHARP EDGES

This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of AplusRF

MATERIAL

N / A

FINISH

N / A

REFERENCE

DRAWN

Sy Kim

DATE

2021. 1. 08

ENGINEER

DATE

APPROVED

Patrick, Cho

DATE

2021. 1. 08

CAD FILE

CAD:/CABLE ASSY/TEST CABLE

TITLE

CABLE ASSEMBLY
SMA(M)RA TO SMA(M)ST
TEST CABLE

DWG SIZE

A4

SCALE

N.S

SHEET

1 of 1

DRAWING No.

AP027-A0MRA0MS-XXX

REV.

A

AplusRF

1

2

3

4

5

6