


REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	21. 1.08		<i>Patrick, Cho</i>

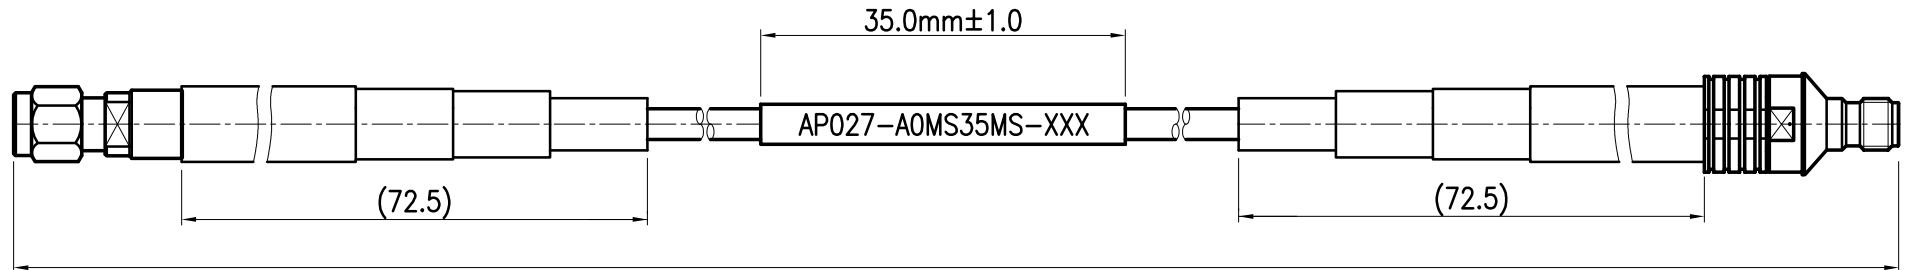

NOTE

1. Specification

- 1.1 Frequency : DC ~ 26.5GHz
- 1.2 Impedance : 50 Ohm nom
- 1.3 VSWR : 1.30 Max.

2. RoHs Compliance : Directive (EU) 2015/863

CABLE INSERTION LOSS

INSERTION LOSS	1.6 dB at 12 GHz
	2.0 dB at 18 GHz
	2.5 dB at 26.5 GHz


UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL 2 PLACE DECIMAL ANGLES 1.6 a $\sqrt{\text{ }}$ \oplus \square
 $\pm 2.0 \text{ mm}$ $\pm 1^\circ$

REMOVE BURRS. BREAK SHARP EDGES

This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of AplusRF

MATERIAL	N / A	DRAWN	DATE
FINISH	N / A	<i>Sy_Kim</i>	2021. 1. 08
REFERENCE		ENGINEER	DATE
		APPROVED	DATE
		<i>Patrick, Cho</i>	2021. 1. 08
		CAD FILE	DWG SIZE
		CAD:/CABLE ASSY/TEST CABLE	A4

TITLE			
CABLE ASSEMBLY SMA(M)ST TO 3.5mm(F)ST TEST CABLE			
SCALE	N.S	SHEET	1 of 1
DRAWING No.	AP027-A0MS35FS-XXX	REV.	A