

1

2


3

4

5

6

REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	21. 1.08		<i>Patrick, Cho</i>

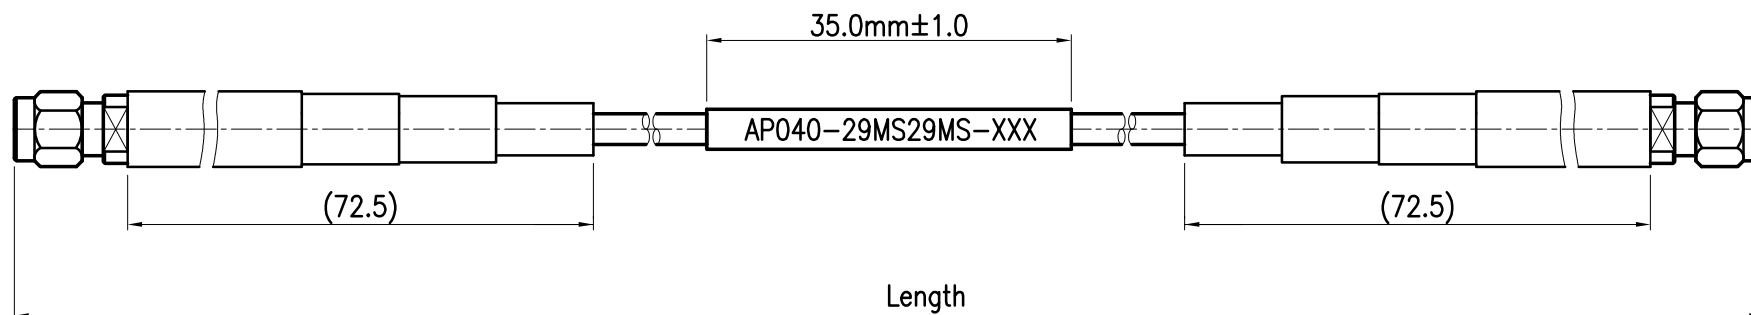

NOTE

1. Specification


- 1.1 Frequency : DC ~ 40GHz
- 1.2 Impedance : 50 Ohm nom
- 1.3 VSWR : 1.35 Max.

2. RoHs Compliance : Directive (EU) 2015/863

CABLE INSERTION LOSS


INSERTION LOSS	1.6 dB at 12 GHz
	2.0 dB at 18 GHz
	2.5 dB at 26.5 GHz
	3.0 dB at 40 GHz

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL 2 PLACE DECIMAL ANGLES 1.6 a 

REMOVE BURRS. BREAK SHARP EDGES

This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of AplusRF

MATERIAL	N / A	DRAWN	<i>Sy Kim</i>	DATE	2021. 1. 08	TITLE CABLE ASSEMBLY 2.92mm(M)ST TO 2.92mm(M)ST TEST CABLE				
FINISH	N / A	ENGINEER		DATE						
REFERENCE		APPROVED	<i>Patrick, Cho</i>	DATE	2021. 1. 08					
		CAD FILE	CAD:/CABLE ASSY/TEST CABLE		DWG SIZE	A4	SCALE	N.S	SHEET	1 of 1
				DRAWING No.	AP040-29MS29MS-XXX		REV.	A		

1

2

3

4

5

6