

1

2


3

4

5

6

REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	21. 1.08		<i>Patrick, Cho</i>

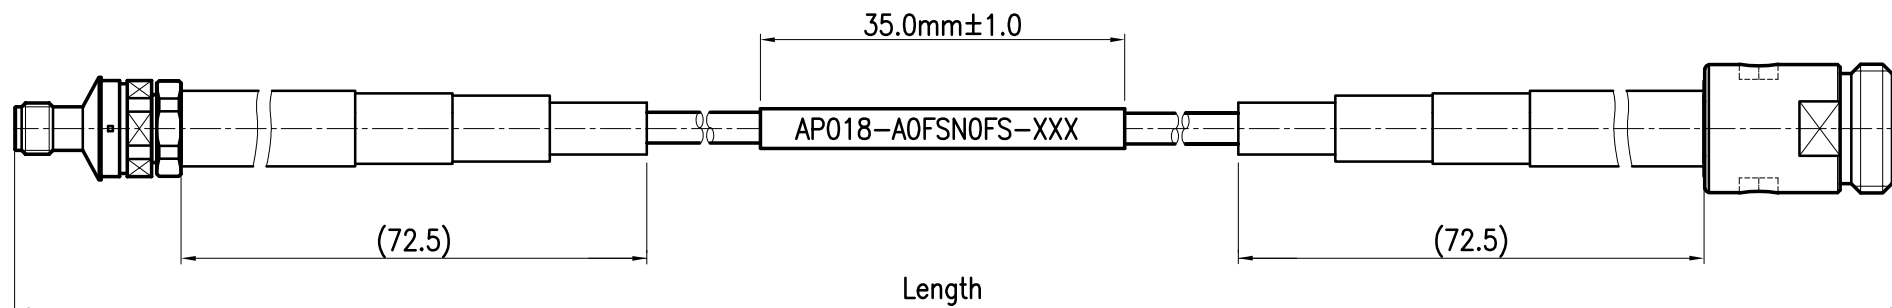

## NOTE

## 1. Specification

- 1.1 Frequency : DC ~ 18GHz
- 1.2 Impedance : 50 Ohm nom
- 1.3 VSWR : 1.30 Max.

## 2. RoHs Compliance : Directive (EU) 2015/863

## CABLE INSERTION LOSS

INSERTION LOSS	
	1.6 dB at 12 GHz
	2.0 dB at 18 GHz

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL    2 PLACE DECIMAL    ANGLES    1.6 a  $\sqrt{\quad}$      $\odot$      $\nabla$   
 $\pm 2.0$  mm     $\pm 1^\circ$

REMOVE BURRS. BREAK SHARP EDGES

This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of AplusRF

MATERIAL	N / A	DRAWN	<i>SY_Kim</i>	DATE	2021. 1. 08	TITLE CABLE ASSEMBLY SMA(F)ST TO N(F)ST TEST CABLE	<b>AplusRF</b>			
FINISH	N / A	ENGINEER		DATE						
REFERENCE		APPROVED	<i>Patrick, Cho</i>	DATE	2021. 1. 08					
		CAD FILE	CAD:/CABLE ASSY/TEST CABLE		DWG SIZE	A4	SCALE	N.S	SHEET	1 of 1
				DRAWING No.	AP018-A0FSN0FS-XXX		REV.	A		

1

2

3

4

5

6