

1

2


3

4

5

6

REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	21. 1.08		<i>Patrick, Cho</i>

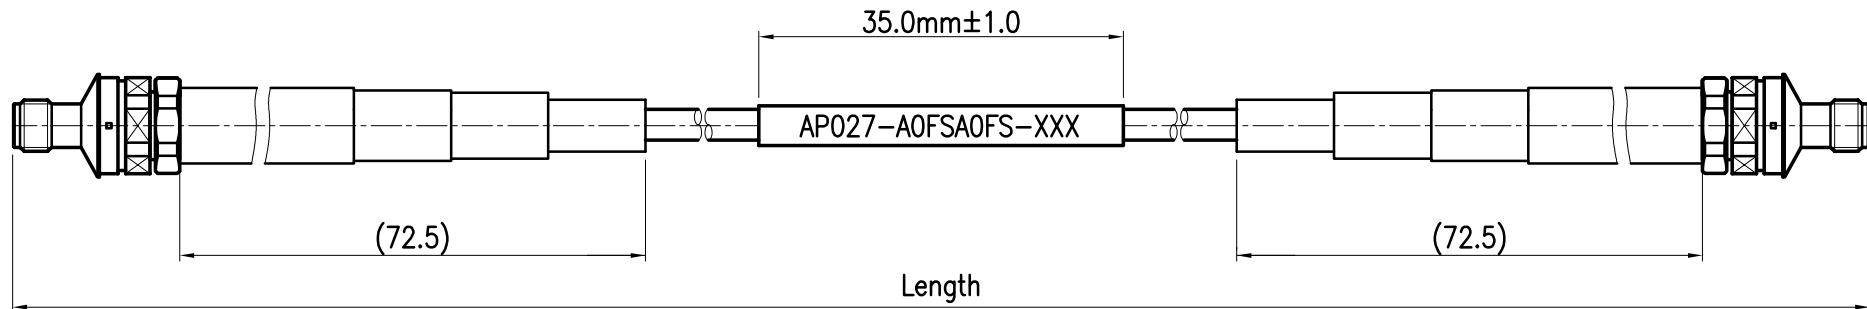

NOTE

1. Specification

- 1.1 Frequency : DC ~ 26.5GHz
- 1.2 Impedance : 50 Ohm nom
- 1.3 VSWR : 1.20 Max.

2. RoHs Compliance : Directive (EU) 2015/863

CABLE INSERTION LOSS

INSERTION LOSS	1.6 dB at 12 GHz
	2.0 dB at 18 GHz
	2.5 dB at 26.5 GHz

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL 2 PLACE DECIMAL ANGLES 1.6 a $\sqrt{\quad}$ \odot ∇
 ± 2.0 mm $\pm 1^\circ$

REMOVE BURRS. BREAK SHARP EDGES

This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of AplusRF

MATERIAL

N / A

FINISH

N / A

REFERENCE

DRAWN

SY Kim

ENGINEER

APPROVED

Patrick, Cho

CAD FILE

CAD:/CABLE ASSY/TEST CABLE

DATE

2021. 1. 08

DATE

DATE

2021. 1. 08

TITLE

CABLE ASSEMBLY
SMA(F)ST TO SMA(F)ST
TEST CABLE

DWG SIZE

A4

SCALE

N.S

SHEET

1 of 1

DRAWING No.

AP027-A0FSA0FS-XXX

REV.

A

1

2

3

4

5

6